

LD202




- Easy-lock connection



- Hose holder with flow limiter





- Integrated filter to collect contamination

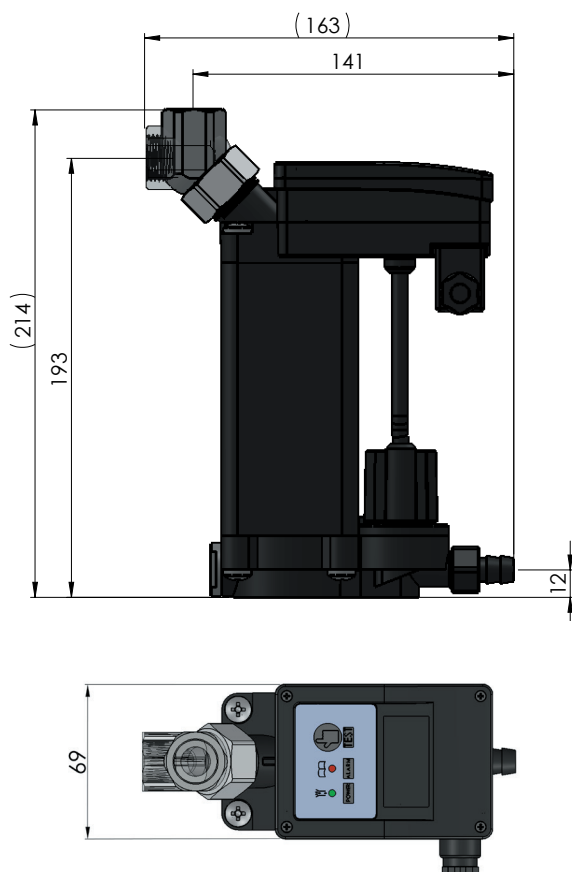

LD202	230 V	115 V	115V UL	24 V	24 Vdc
Power supply (±10%)	230 V (50/60 Hz)	115 V (50/60 Hz)	115 V (50/60 Hz)	24 V (50/60 Hz)	24 V dc
Power (during drainage)	10 VA				
Alarm contact	Contact NC/NO: 240V Ac max - 1A / 30V Dc max - 1A				
Working pressure	0,2-16 bar				
Working temperature	+1/+60 °C				
Protection class	IP65 (with connector and correctly assembled basket)				
Electric connection	EN 175301-803 Type B (ex DIN 43650) (Supplied)				
Alarm connection	M12 Code A 4 Poles (Not supplied)				
Nominal flow (m ³ /min) (1)	30				
Nominal drain (lt/h)	20				
Maximum drain (lt/h)	35				
Maximum compressor capacity (m ³ /min)	30				
Maximum dryer capacity (m ³ /min)	60				
Maximum filter capacity (m ³ /min)	300				
Inlet	1 x G1/2"F	1 x G1/2"F NPT	1 x G1/2"F	1 x G1/2"F	
Outlet (with flow limiter)	1 x ø12				
Weight (kg)	1,2				
Receiver volume (l)	0,22				
Certificates	CE		CE + UL	CE	
Code	15-452	15-451	15-455	15-453	15-454

(1) = Data refer to 1000 mbar(a), 20° C and 60% relative humidity. Operating pressure 7 bar and outlet temperature of the aftercooler 35° C.

LD202L

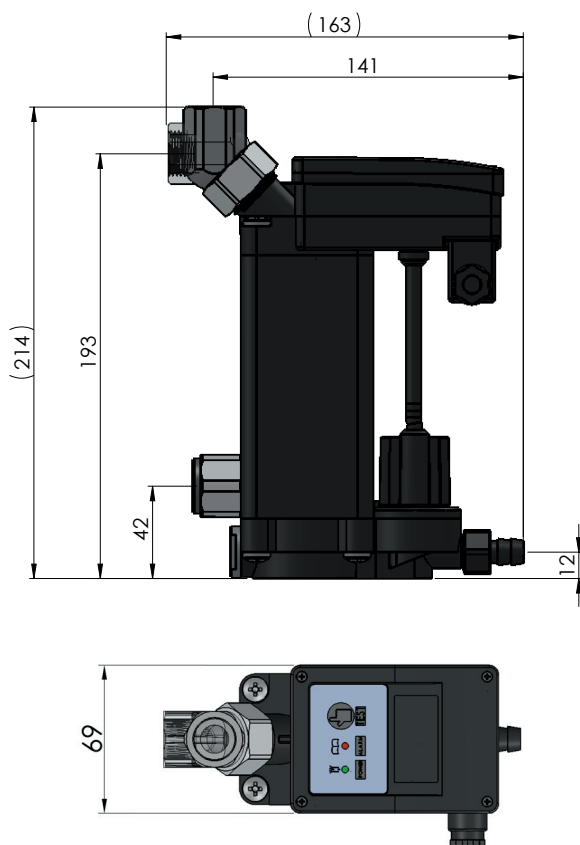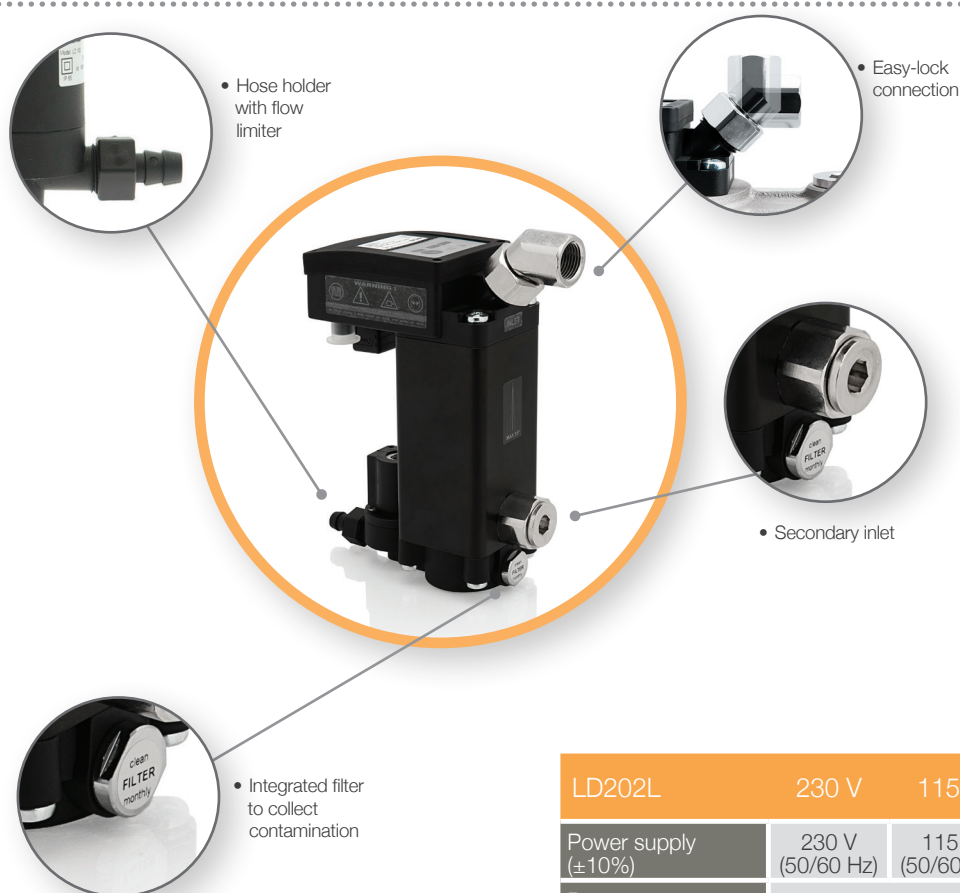

LD202L	230 V	115 V	115 V UL	24 V	24 Vdc
Power supply (±10%)	230 V (50/60 Hz)	115 V (50/60 Hz)	115 V (50/60 Hz)	24 V (50/60 Hz)	24 V dc
Power (during drainage)	10 VA				
Alarm contact	Contact NC/NO: 240V Ac max - 1A / 30V Dc max - 1A				
Working pressure	0,2-16 bar				
Working temperature	+1/+60 °C				
Protection class	IP65 (with connector and correctly assembled basket)				
Electric connection	EN 175301-803 Type B (ex DIN 43650) (Supplied)				
Alarm connection	M12 Code A 4 Poles (Not supplied)				
Nominal flow (m ³ /min) (1)	30				
Nominal drain (lt/h)	20				
Maximum drain (lt/h)	35				
Maximum compressor capacity (m ³ /min)	30				
Maximum dryer capacity (m ³ /min)	60				
Maximum filter capacity (m ³ /min)	300				
Inlet	1 x G1/2"F + 1 x G3/4"M - G1/2"F (2)				
Outlet (with flow limiter)	1 x ø12				
Weight (kg)	1,2				
Receiver volume (l)	0,22				
Certificates	CE		CE + UL	CE	
Code	15-472	15-471	15-475	15-473	15-474

(1) = Data refer to 1000 mbar(a), 20° C and 60% relative humidity. Operating pressure 7 bar and outlet temperature of the aftercooler 35° C.
 (2) = For NPT version, minimum purchase lots are required. Get in touch with the Customer Service.